


## **CHT2000 Hot Tapping machine** **80" stroke – Ø6 - 24" capacity**

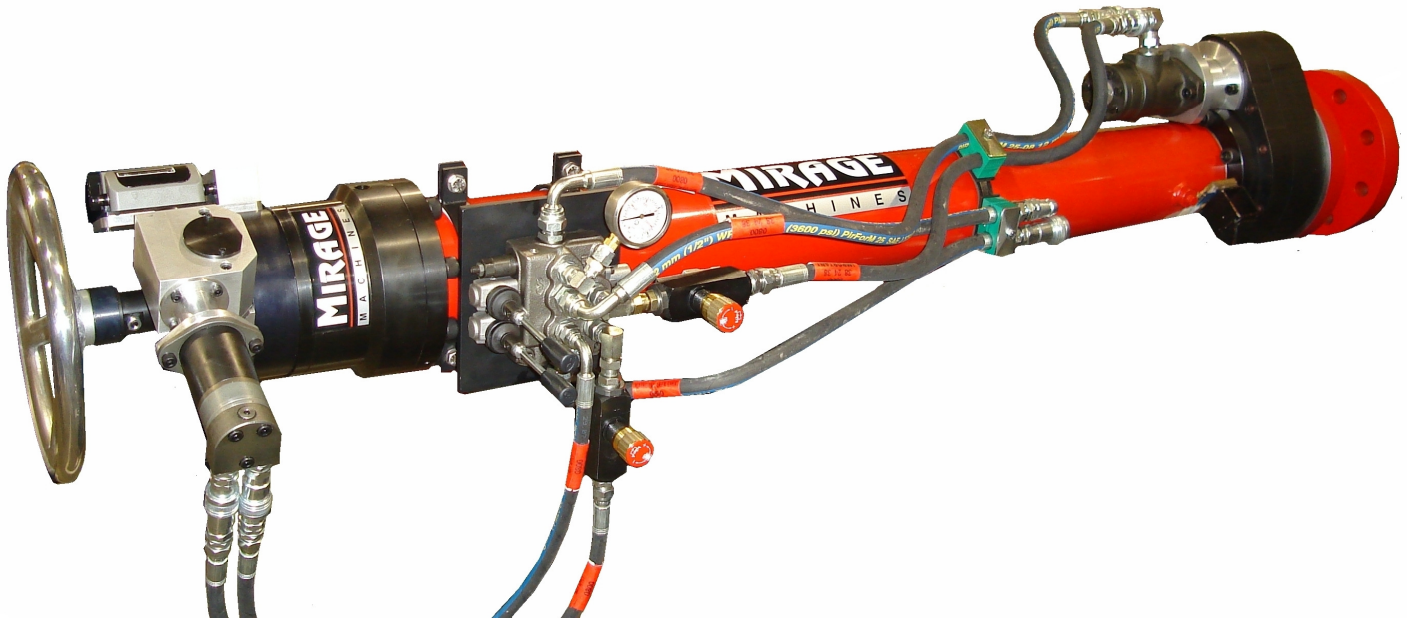

A Hot tapping machine that have a working pressure capacity of 5000 p.s.i maximum and can Hot tap from Ø6 – 24" specifically designed for all pipeline intervention and wellhead maintenance.

- ***Helical geared drive.***
- ***Drive as close to cutter as possible***
- ***Internally pressure balanced system***
- ***Auto variable feed gearbox and motor***
- ***Geared mechanical depth display***
- ***Constant seal & pressure monitoring***



# Technical Details

RANGE		
Minimum tapping hole diameter	150mm	6"
Maximum tapping hole diameter	610mm	24"
Maximum design operating pressure	5000 p.s.i	345 bar
Standard certified operating pressure	1480 p.s.i	100 bar
Maximum operating temperature	200° C	392° F
Spindle bar travel	2000mm	80"
Spindle bar minimum clearance	102mm	4"
R.P.M	Min: 5	Max: 40
Drive – Hydraulic ( weight + 6 kgs)	35.0 Hp	26 Kw
Hydraulic supply required @ 1050 p.s.i	60 L/min	16 gal/min

FEED RATES		
Feed rate – Manual / revolution	10mm	0.393"
Feed rate auto feed	0 - 8mm/min	0 - .315"/min

WEIGHTS AND DIMENSIONS		
Machine weight	1110 kgs	2442 lbs
Shipping weight	1250 Kgs	2750 lbs

Shipping dimensions	L - 360cm - (142")	W- 81cm (32")	H- 75cm (30")
---------------------	--------------------	---------------	---------------

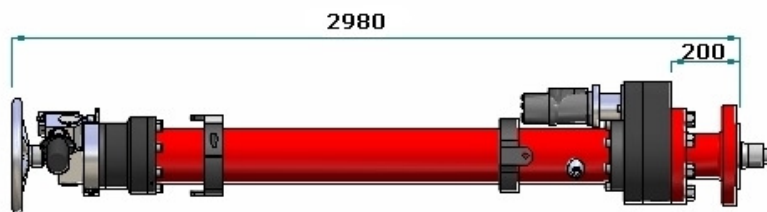

The machine is supplied complete with Hot tap machine, feed and drive motor, lifting brackets, (3-4"), (6-12") cutter holders, connection hoses and pressure gauge, Toolkit, air filter lubricator (when required), all required mounting studs and nuts and connection spool, storage / shipping box, CE certificate, Packing list and Manual – pressure certification 1480 psi (100 bar)

## Pishgam Sanat Abzar Co.

Main office: No 372, 3rd floor, Abzar & Yaragh center, Imam Khomeini Street, Tehran, Iran

Tel. +982166712530, +982166713540

Manufacturing site: No. 3, 15 th St., Rezvanieh, Kamalshahr, Karaj, Iran. Tel.; +982634717900-4

info@pishgam.co.ir, www.pishgam.co.ir



# Optional Accessories

 <p><b>HTC3 – HTC36</b> Standard hot tap cutters from 3 – 36"</p>	 <p><b>HYPP60-30-3ph</b> 15 Hp tandem hydraulic power pack 60 lpm @ 70 bar – 380/440v 3 phase <b>HYPP60-D</b> 15Hp hydraulic power pack 60 lpm @ 70 bar – diesel engine</p>
 <p><b>SHTPD3 – SHTPD36</b> Standard hot tap pilot drills with wire retainers</p>	 <p><b>CHT-5000PT</b> Third party pressure test with calibrated test equipment</p>
 <p><b>LSC4 – LSC36</b> Line stop cutters 4 – 36"</p>	 <p><b>LSPD4 –LSPD36</b> Standard line stop pilot drills with wire retainers</p>
 <p><b>150-3FA – 600-24FA</b> Standard flange adapters (3 – 24") #150, #300, #600</p>	 <p><b>SPECIAL FLANGE ADAPTERS</b> Special flange adapters (3 – 24") #900, #2500, PN16, API and line stop</p>
 <p><b>HTC3EX – HTC36EX</b> Extended hot tap cutters from 3 – 36"</p>	 <p><b>SHTPD3EX – SHTPD36EX</b> Extended hot tap pilot drills 3 – 36"</p>
 <p><b>LSFH4 – LSFH36</b> Line stop folding heads 4 – 24"</p>	 <p><b>LSA2-6 – LSA6-12 – LSA12-24</b> Line stop actuator machines (manual and hydraulic)</p>

## Pishgam Sanat Abzar Co.

Main office: No 372, 3rd floor, Abzar & Yaragh center, Imam Khomeini Street, Tehran, Iran  
Tel. +982166712530, +982166713540

Manufacturing site: No. 3, 15 th St., Rezvanieh, Kamalshahr, Karaj, Iran. Tel.; +982634717900-4  
info@pishgam.co.ir, www.pishgam.co.ir

